SPECIFICATION SHEET

QTY:



D40

TYPE:

Dimmable LED driver

TYPE: forward phase triac dimming, constant voltage

PROJECT:

POWER: 40 wcv

INPUT VOLTAGE: 120 volts AC, 60Hz

OUTPUT CURRENT: 3.3 A

DIMMING: 5%-100%

POWER FACTOR: 0.95

DIELECTRIC STRENGTH: 3000 vac

CONSTANT CURRENT PRECISION: 5%


DIMENSIONS: 132x44x23mm/5.2x1.75x0.91"

PROTECTION: shortage, overload

CLASS: IEC Class III, SELV

CERTIFICATION: cETLus, CE, ROHS

COMPATIBILITY: To be used with conventional forward phase or leading edge type dimmers (same type used for incandescent or low voltage magnetic halogen). **Not compatible with electronic reverse phase or trailing edge dimmers.**

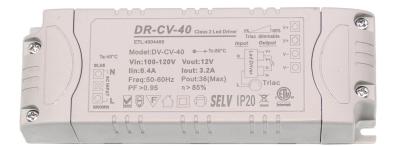

SPECIFICATION SHEET

LUMENARMONTREAL.CA – 514-400-5495 – LUMENARTMONTREAL@GMAIL.COM

DUE TO CONTINUOUS IMPROVEMENTS, THIS INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE